
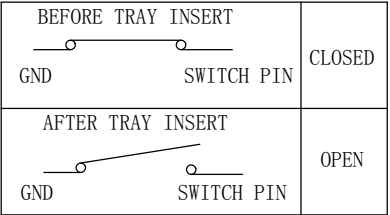


NOTES:  
 1. PRODUCT SPECIFICATIONS:  
 1-1: VOLTAGE RATING: 10V  
 1-2: CURRENT RATING: 0.5A  
 1-3: INSULATION RESISTANCE: 1000 MEG. OHM MIN  
 1-4: CONTACT RESISTANCE: INITIAL & AFTER TEST 60m Ω Max;  
 1-5: OPERATION TEMPERATURE: -25°C TO +85°C  
 1-6: DURABILITY: 3000 CYCLES  
 2. ALL DIMENSIONS MARKED ▼ MUST BE CONTROLLED BY QC  
 3. GP PASSED ACCORD WITH HRD-RoHS-219 STANDARD.  
 4. ALL DIMENSIONS MARKER (XX) MUST BE MEASURE BY FAI.  
 5. DIMENSIONS WITH MARK "⊙" MUST BE CHECKED CPK.

5	Lever Bar	1	SUS304-3/4H T=0.40mm	N/A
4	lever	1	SUS304-3/4H T=0.50mm	N/A
3	Detect pin	1	C7025-TM03 T=0.12mm	3u"Min Au plating on contact area 1u"Min Au plating on Solder Tails 50~120u"Ni underplating over all
2	Shield	1	SUS304-3/4H T=0.12mm	1u"Min Au plating on Solder Tails 50~120u"Ni underplating over all
1	Housing	1	LCP E471i	RAW MATERIAL
ITEM NAME	QTY	PLATING PART NO.	PLATING SPEC	

				UNITS: mm	GENERAL TOLERANCE		DRAW:	PART NO: S176-5B03F13F
				DATE: 12/14/2018	X. ±0.25	X' ±5.00'	CHECKED:	NAME: 双NANO SIM+TF卡座 组合件 板上1.35H
				SCALE: 4/1	X ±0.15	X' ±3.00'	APPROVE:	DRAWING NO: C-S176-0000_A
				SHEET: 1/1	.XX ±0.10	.XX' ±1.00'		
				REV. A	.XXX ±0.05	.XXX' ±0.50'		
REV.	ECN NO.	DESCRIPTION	DATE	FINISH: SEE NOTE				
A		NEW	12/14/2018	TITLE: CUSTOMER DRAWING		昆山捷皇电子精密科技有限公司 HONGRIDA ELECTRONIC TECHNOLOGY CO., LTD.		

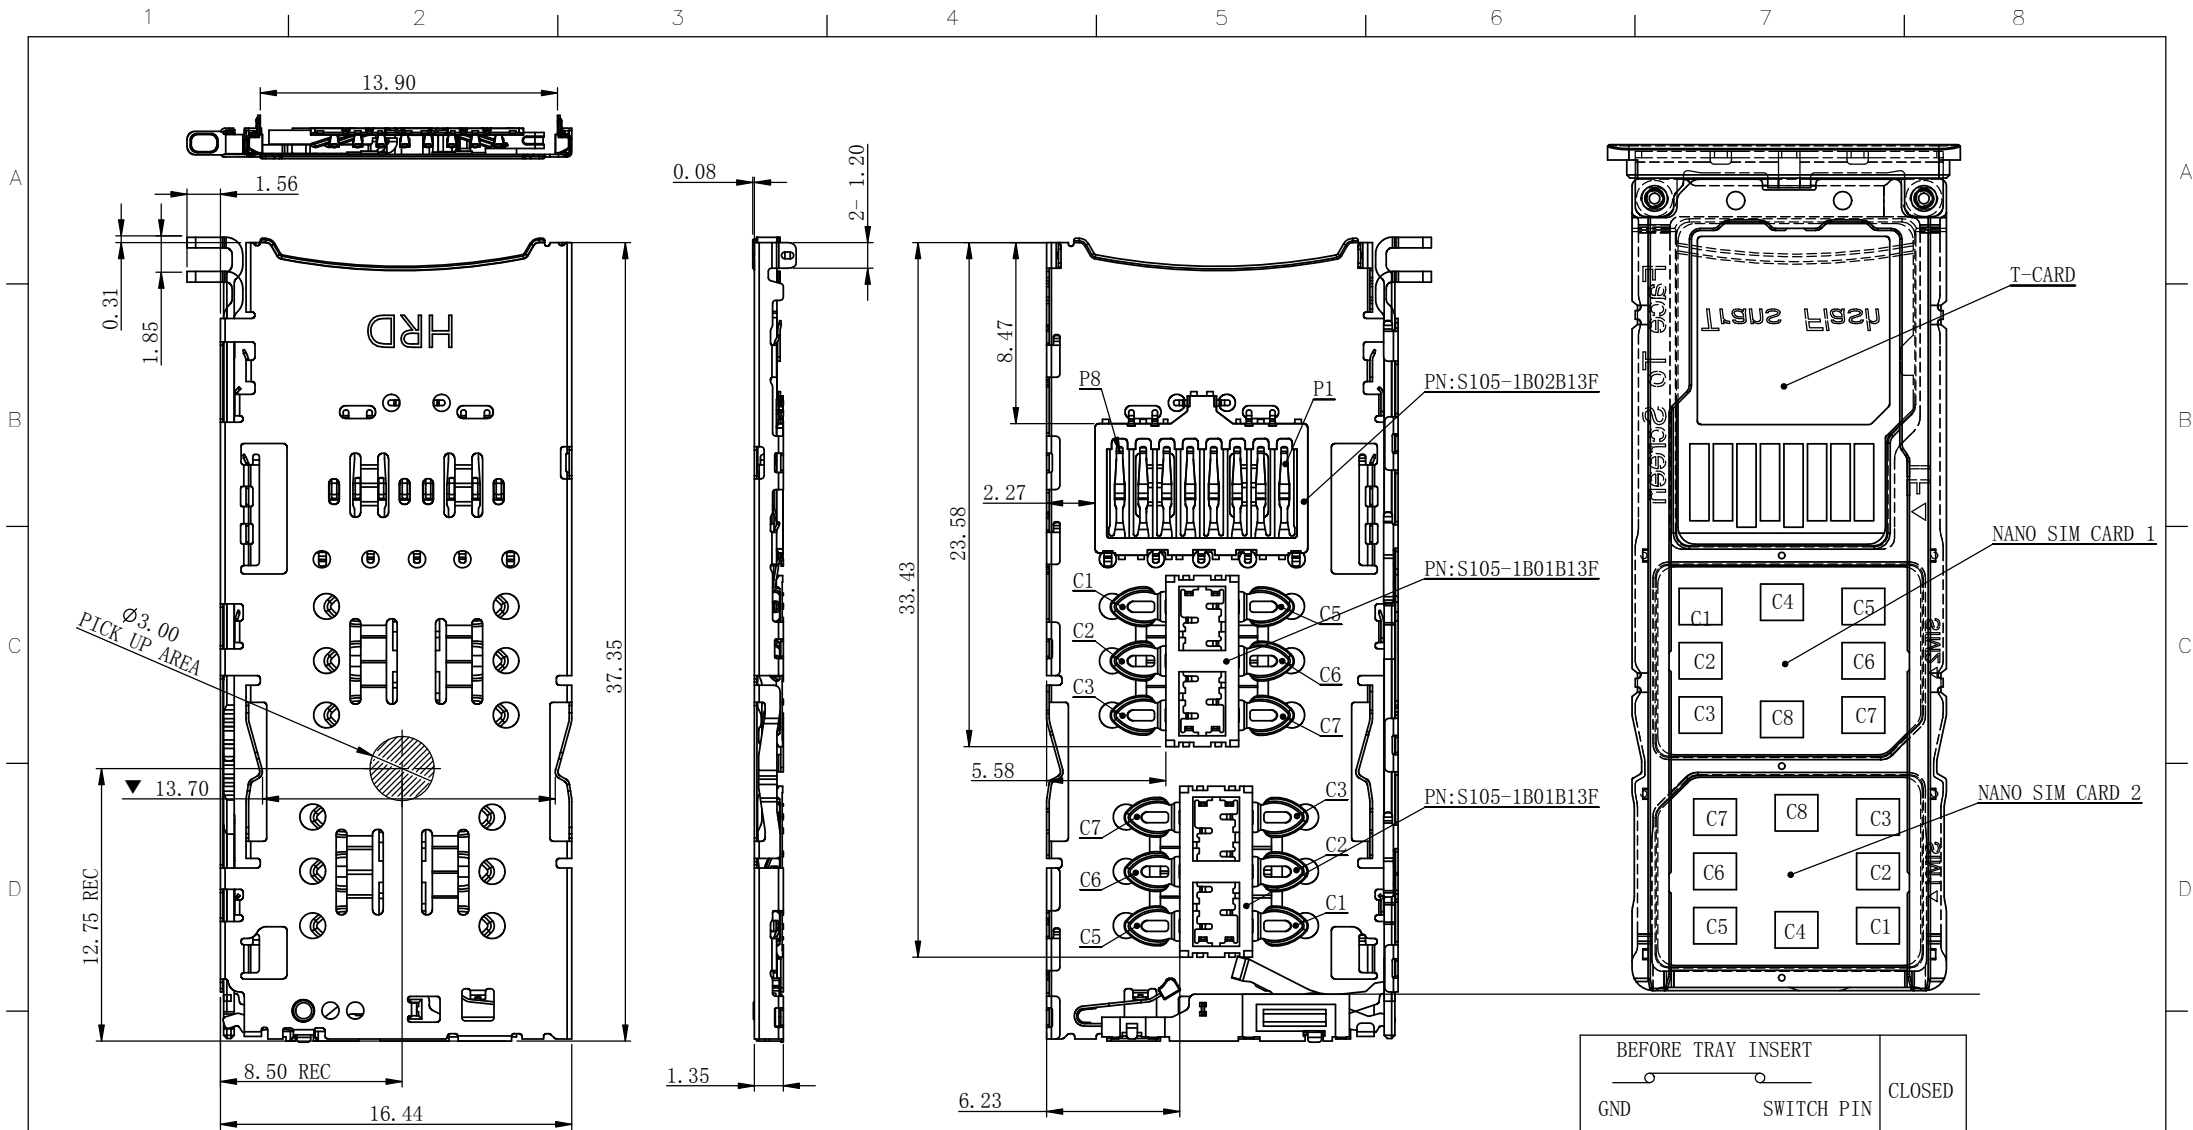

PIN/NO.	SIM CARD ASSIGNMENT	PIN/NO.	MICRO SD CARD ASSIGNMENT
C1	Vcc	P1	DAT2
C2	RST	P2	CD/DAT3
C3	CLK	P3	CMD
C4	RESERVED	P4	VDD
C5	GND	P5	CLK
C6	Vpp	P6	VSS
C7	I/O	P7	DATO
C8	RESERVED	P8	DAT1

REV.	ECN NO.	DESCRIPTION	DATE	REV.	FINISH:	SEE NOTE	UNITS:	GENERAL TOLERANCE	DRAW:	PART NO.:
A		NEW	12/14/2018	1/2			mm	X. ±0.25 X' ±0.15 .XX ±0.10 .XXX ±0.05		S176-5B03F13F
							DATE:	X." ±5.00' X' ±3.00' .XX" ±1.00' .XXX" ±0.50'	CHECKED:	NAME: 双NANO SIM +TF 卡座 板上1.35H 三选三
							SCALE:		APPROVE:	DRAWING NO: C-S176-0000_A
							SHEET:	TITLE: CUSTOMER DRAWING		

 昆山捷皇电子精密科技有限公司  
HONGRIDA ELECTRONIC TECHNOLOGY CO., LTD.

