

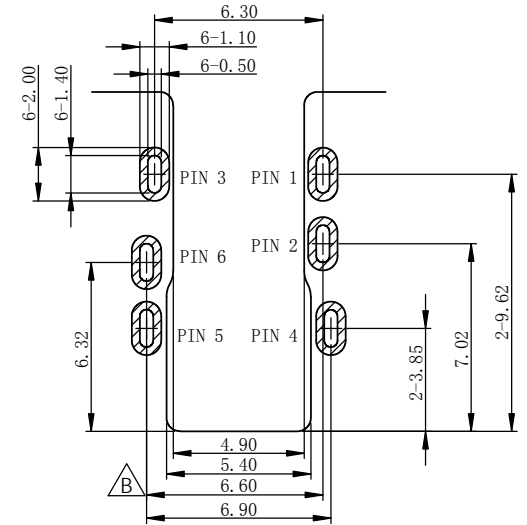
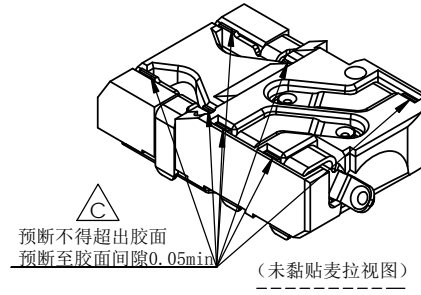
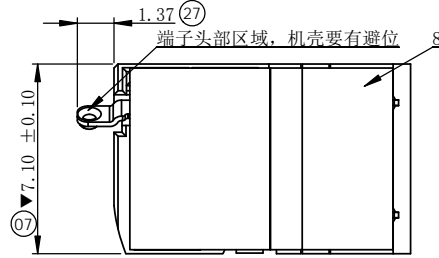
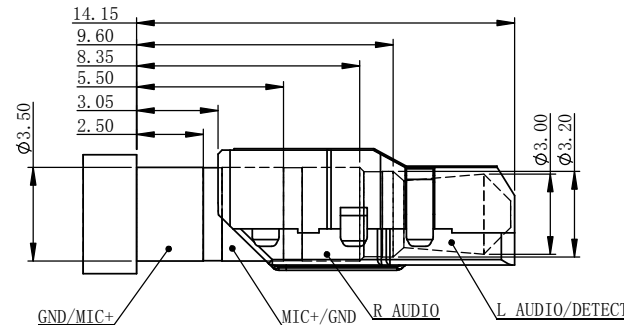
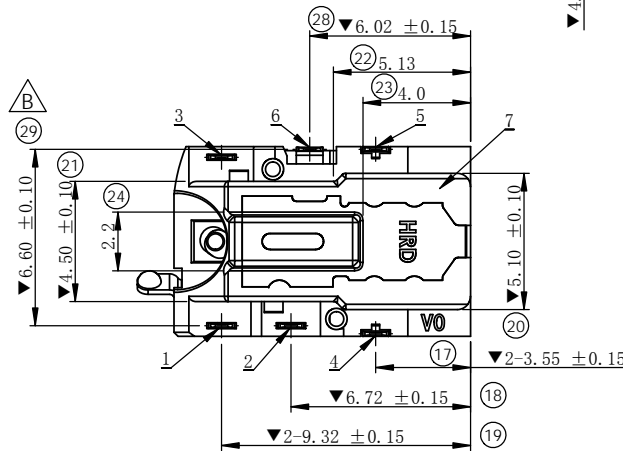



8	MYLAR	PET T=0.05	YELLOW	
7	HOUSING	PA9T	BLACK	
6	SHELL	SUS 304	—	可焊镍50u" MIN PLATING ALL OVER
5	TERMNAL 5	SUS 304	—	AU 5u" Plating on contact Area
4	TERMNAL 4	SUS 304	—	AU 5u" Plating on contact Area
3	TERMNAL 3	COPPER ALLOY	—	AU 5u" Plating on contact Area
2	TERMNAL 2	COPPER ALLOY	—	AU 5u" Plating on contact Area
1	TERMNAL 1	COPPER ALLOY	—	AU 5u" Plating on contact Area
NO.	DESCRIPTION	MATERIAL	COLOR	REMARK

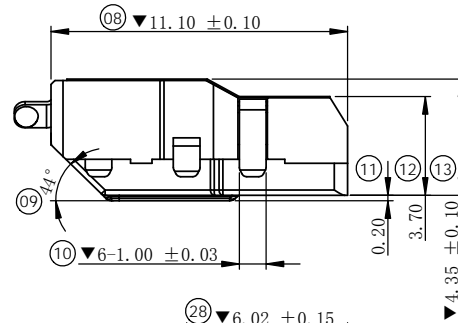


PCB LAYOUT T=0.50mm (TOLERANCE:0.05mm)

NO.	DESCRIPTION
1	GND / MIC+
2	MIC+ / GND
3	R AUDIO
4	L AUDIO / DETECT
5	DETECT / L AUDIO
6	GND

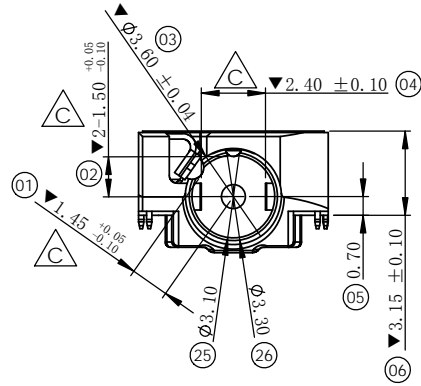

PRODUCT APPLICATION:
THE SPRING WORKING POSITION WHEN PLUG IN



NOTES:

- MATERIAL:
HOUSING:PA 9T, BLACK, UL 94HB
TERMINAL:SEE TABLE
- FINISH:
CONTACT:AU 5u" Min PLATING ON CONTACT AREA
G/F PLATING ON SOLDER TAILS AREA
SHELL:可焊镍50u" MIN PLATING ALL OVER
- ALL DIMENSIONS MARKED ▼ MUST BE CONTROLLED BY QC
- PRODUCT SPECIFICATIONS:
4-1 WITHSTANDING: 500VAC/MINUTE
4-2 CONTACT RESISTANCE: 50 MILLIOHM (initial) Max.
4-3 INSULATION RESISTANCE: 100 MEGOHM Min.
4-4 MATING AND UNMATING FORCE : 0.5-2.0 Kgf Max. (BTFORE DURABILITY)
4-5 MATING AND UNMATING FORCE : 0.4-2.0 Kgf Max. (AFTER DURABILITY)
4-6 OPERATION TEMPERATURE : -40° TO +85°
4-7 STORAGE TEMPERATURE: -40° TO +85°
4-8 DURABILITY : 10000 CYCLES

REV.	ECN NO.	DESCRIPTION	DATE	UNITS: mm	GENERAL TOLERANCE	DRAW:	PART NO:
C	E1910629A	1.产品增加预断管控. 2.更新弹高标注方式	10/30/2019	DATE: 03/12/2018	X. ±0.20 X' ±0.15 .XX ±0.10 .XXX ±0.05	X. ±2.00 X' ±1.00 .XX ±0.50 .XXX ±0.50	PH89-3B31A43M
B	E1808013A	图面更新	08/04/2018	SCALE: 5/1		CHECKED:	NAME: Ø3.50MM PHONE JACK CONN. 板上3.15mm,CH=0.70mm
A		NEW	03/12/2018	SHEET: 1/1	TITLE: Assembly drawing	APPROVE:	DRAWING NO: A-PH89-0300
				REV. A	FINISH: SEE NOTE		



昆山捷皇电子精密科技有限公司
HONGRIDA ELECTRONIC TECHNOLOGY CO., LTD.